

LOW-COST, HIGH-PERFORMANCE DECKING & FASCIA

Trex Enhance® decking and Trex® Fascia are wood thermoplastic composite lumber (WTCL) boards with an integrated shell that covers the boards on the top surface and sides. The integrated shell consists of a proprietary surface formulation that produces a natural, wood-like grain pattern finish. An alternative to naturally durable hardwood lumber, Enhance Decking and Fascia are ICC-ES ESR-1328 certified to be a minimum of 95.4% recycled content of wood fiber and polyethylene by weight.



- **Shell:** impact-, scratch- and fade-resistant
- **Core:** 95% recycled materials



DECKING

FASCIA



1" Grooved edge

1" Square edge



8" or 12" Widths

FEATURES	DECKING BOARDS		FASCIA BOARDS	
	1" x 6"		8"	12"
Actual Dimensions - Standard	.94" x 5.5"		.56" x 7.25"	.56" x 11.375"
Actual Dimensions - Metric	24 mm x 140 mm		14 mm x 184 mm	14 mm x 288 mm
Available Lengths - Standard	12', 16', 20'		12'	12'
Available Lengths - Metric	365 cm, 487 cm, 609 cm		365 cm	365 cm
Grooved Edge	X			
Square Edge	X		X	X
Weight per Lineal Foot	1.9 lbs		2.0 lbs	3.3 lbs


PHYSICAL & MECHANICAL PROPERTIES

TEST	TEST METHOD	VALUE
Flame Spread	ASTM E 84	Class C
Thermal Expansion	ASTM D 1037	1.9 × 10 ⁻⁵ in/in/°F
Moisture Absorption	ASTM D 1037	< 1%
Screw Head Pull-Through	ASTM D1761	161 lbf/screw*
Fungus Resistance	ASTM D1413	Rating – no decay
Termite Resistance	AWPAE1-72	Rating = 9.6


*Fastener used in testing: #8 x 2.5" approved Stainless Steel Screw

COLORS


Naturals (multi-tonal)

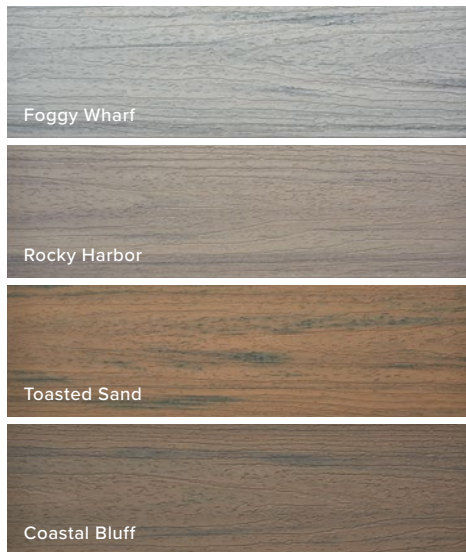

Basics (monochromatic)

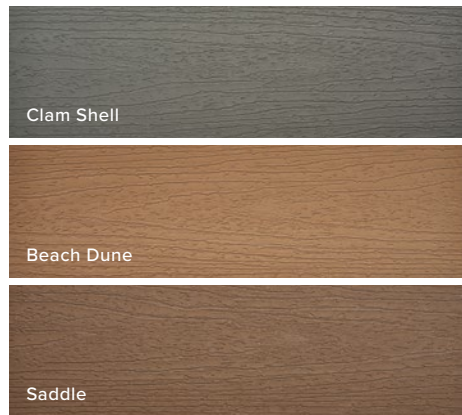

FASTENERS

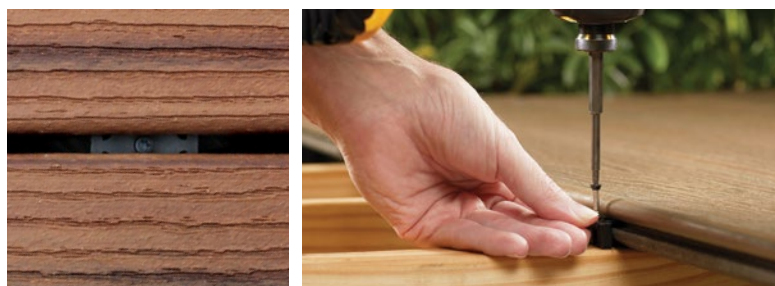

Trex Hideaway® Hidden Fastening System

Self-gapping, glass-filled nylon fastener with 304 grade stainless steel, sharp point screw for wood framing.

Other approved fasteners include, color-matched composite deck screw, matching composite plug with composite screw, color-coordinated fascia screw and uncoated stainless steel fascia screw.

For a full list of approved fasteners, download our Installation Guide at trex.com/literature

